





					Properties	Test conditions		Value	Unit	Tol.
					Inductance	10 kHz / 5 mA	L	470	μH	±20%
					Rated current	ΔT = 40 K	Ι <sub>R</sub>	1.6	А	max.
					DC Resistance		R <sub>DC</sub>	0.225	Ω	max.
C Scl	hematic:									
		$\gamma$	$\gamma\gamma$	<u></u>	der worst case op •Ambient tempe •Operating tempe •Storage temper •Test conditions if not specified	d that the temperation perating conditions. rrature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently	65°C (refei -105°C lging): -20	ring to I <sub>R</sub> ) °C to +40°		
7.6				Projection	It is recommende der worst case op •Ambient tempe •Operating tempe •Storage temper •Test conditions if not specified	d that the temperation perating conditions. Pature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper	65°C (refei -105°C lging): -20	ring to I <sub>R</sub> ) °C to +40°		
7.6	2014-01-08	SSt SSt	SSt IPC	Projection	It is recommended der worst case op •Ambient tempe •Operating tempe •Storage temper •Test conditions if not specified	d that the temperation perating conditions. erature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° c, 33% RH	C; 75% R⊦	
7.5	2013-10-17	SSt	JRS		It is recommended der worst case op •Ambient tempe •Operating tempe •Storage tempel •Test conditions if not specified	d that the temperation perating conditions. rrature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° c, 33% RH	C; 75% R⊦	
7.5 7.4	2013-10-17 2013-04-22	SSt SSt	JRS SSt	Projection 	It is recommended der worst case op •Ambient tempe •Operating tempe •Storage tempel •Test conditions if not specified	d that the temperation perating conditions. erature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° c, 33% RH	C; 75% R⊦	
7.5 7.4 7.3	2013-10-17 2013-04-22 2012-12-04	SSt SSt SSt	JRS SSt SSt	Würth Elektronik eiSos Gmb EMC & Inductive Solutions Max-Eyth-Str. 1	It is recommended der worst case op •Ambient tempe •Operating tempe •Storage temper •Test conditions if not specified H & Co. KG	d that the temperation perating conditions. Frature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently CRIPTION <b>E-FI Leaded</b>	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° 2, 33% RH <b>al Line</b> (	C; 75% R⊦ <b>Choke</b>	I max.
7.5 7.4 7.3 7.2	2013-10-17 2013-04-22 2012-12-04 2012-10-24	SSt SSt SSt SSt	JRS SSt SSt SMu	Würth Elektronik eiSos Gmb EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	It is recommended der worst case op •Ambient tempe •Operating tempe •Storage temper •Test conditions if not specified H & Co. KG	d that the temperation perating conditions. erature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° 2, 33% RH <b>al Line</b> (	C; 75% R⊢ Choke	I max.
7.5 7.4 7.3	2013-10-17 2013-04-22 2012-12-04	SSt SSt SSt	JRS SSt SSt	Würth Elektronik eiSos Gmb EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg	It is recommended der worst case op •Ambient tempe •Operating tempe •Storage tempel •Test conditions if not specified H & Co. KG	d that the temperation perating conditions. Frature: -40°C to +6 perature: -40°C to + rature (in tray packa of Electrical Proper differently CRIPTION <b>E-FI Leaded</b>	65°C (refei -105°C ging): -20 ties: 20°C	ring to I <sub>R</sub> ) °C to +40° 2, 33% RH <b>al Line</b> (	C; 75% R⊦ <b>Choke</b>	I max.




### **D** Electrical Properties:

Properties	Test conditions		Value	Unit	Tol.
Inductance	10 kHz / 5 mA	L	470	μH	±20%
Rated current	∆T = 40 K	I <sub>R</sub>	1.6	А	max.
DC Resistance		R <sub>DC</sub>	0.225	Ω	max.

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended by use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, hip) control, train control, hip control, train control, hip



## F1 Typical Impedance Characteristics:

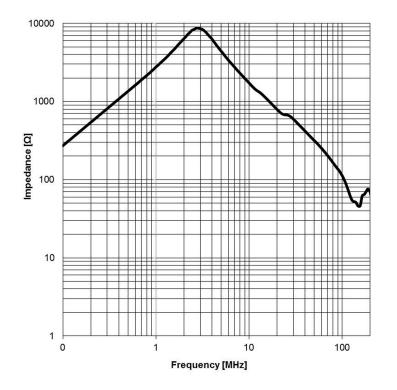


				Projection ,		DESCRIPTION		
7.6	2014-01-08	SSt	SSt	-E-1-@-				
7.5	2013-10-17	SSt	JRS			WE-FI Leaded	Toroidal Line Choke	
7.4	2013-04-22	SSt	SSt	Würth Elektronik eiSos Gmb	H & Co. KG			
7.3	2012-12-04	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1				
7.2	2012-10-24	SSt	SMu	74638 Waldenburg		Order No.	COMPLIANT	SIZE
7.1	2012-06-27	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0		7447040	ROHS&REACh	ULL
7.0	2012-05-03	SSt	CZ	www.we-online.com eiSos@we-online.com		7447010		A4
REV	DATE	BY	CHECKED					

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, ship control, ship control, ship control, ship control, ship control, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

## **H Soldering Specifications:**



### H4: Classification Wave Soldering Profile:

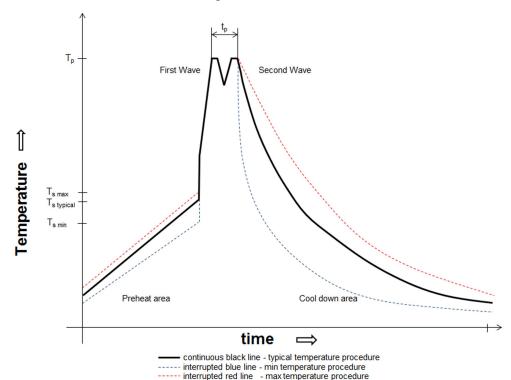

## **H5: Classification Wave Profile**

Profile Feature	Pb-Free Assembly	Sn-Pb Assembly
Preheat - Temperature Min (T <sub>smin</sub> ) - Temperature Typical (T <sub>stypical</sub> ) - Temperature Max (T <sub>smax</sub> ) - Time (t <sub>s</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	100°C 120°C 130°C 70 seconds	100°C 120°C 130°C 70 seconds
$\Delta$ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (T <sub>p</sub> )	250°C - 260°C	235°C - 260°C
Time of actual peak temperature (t <sub>p</sub> )	max. 10 seconds max. 5 second each wave	max. 10 seconds max. 5 second each wave
Ramp-down rate - Min - Typical - Max	~ 2 K/s ~ 3.5 K/s ~ 5 K/s	~ 2 K/s ~ 3.5 K/s ~ 5 K/s
Time 25°C to 25°C	4 minutes	4 minutes

refer to EN 61760-1:2006

					Projection		DESCRIPTION		
	7.6	2014-01-08	SSt	SSt					
	7.5	2013-10-17	SSt	JRS			WE-FI Leaded	Toroidal Line Choke	
	7.4	2013-04-22	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG			
	7.3	2012-12-04	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1				
Γ	7.2	2012-10-24	SSt	SMu	74638 Waldenburg		Order No.	COMPLIANT	SIZE
Γ	7.1	2012-06-27	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0			ROHS&REACh	UZE
	7.0	2012-05-03	SSt	CZ	www.we-online.com eiSos@we-online.com		7447010		A4
	REV	DATE	BY	CHECKED					

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a failure of the product is reasonably expected to cause severe personal highry or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation network etc... Würth Elektronik eiSos GmbH & Co KG must be informed on every electronic component which is used in detrical inclusion or performance.

## I Cautions and Warnings:

# The following conditions apply to all goods within the product series of WE-FI of Würth Elektronik eiSos GmbH & Co. KG:

### General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

#### Product specific:

Follow all instructions mentioned in the data sheet, especially:

- The solder profile has to be complied with according to the technical wave soldering specification, otherwise this will void the warranty.
- •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.



				Projection		DESCRIPTION	
7.6	2014-01-08	SSt	SSt	-E-1-@-			
7.5	2013-10-17	SSt	JRS			WE-FI Leaded	Toroidal Line Choke
7.4	2013-04-22	SSt	SSt	Würth Elektronik eiSos GmbH	1 & Co. KG		
7.3	2012-12-04	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1			
7.2	2012-10-24	SSt	SMu	74638 Waldenburg		Order No.	COMPLIANT
7.1	2012-06-27	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0		7447040	ROHS&REACh
7.0	2012-05-03	SSt	CZ	www.we-online.com eiSos@we-online.com		7447010	A4
REV	DATE	BY	CHECKED	clous@wc oninc.com			

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not autiborized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, eviation, nuclear control, transportation (automotive control, transportation signal, disaster prevention, medical, public information network etc... Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability venuation checks for safety must be performed on every electrical incourted, transportation cause or performance.

## **J Important Notes:**

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

7.6	2014-01-08	SSt SSt	SSt	Projection		DESCRIPTION	Toroidal Line Choke	
7.4	2013-04-22	SSt	SSt	Würth Elektronik eiSos Gmbł			TUTUIUAI LITE GIUKE	
7.3	2012-12-04	SSt	SSt	EMC & Inductive Solutions	Π & UU. KG			
7.2	2012-10-24	SSt	SMu	Max-Eyth-Str. 1 74638 Waldenburg		Order No.	COMPLIANT	SIZE
7.1	2012-06-27	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0			<b>ROHS&amp;REACH</b>	JIZL
7.0	2012-05-03	SSt	CZ	www.we-online.com eiSos@we-online.com		7447010		A4
REV	DATE	BY	CHECKED					

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eSos GmbH & Co KG products are neither designed nor intended for use in equipment unclear control, submarine, transportation (automotive control, train control, sign control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

